

3-in-1 Current Transformers

A range of 3-in-1 current transformers combine three traditional current transformers in one moulded case. 3-in-1 current transformers can be directly installed next to a three-phase moulded case circuit breaker, thus saving installation time where fitting three standard individual current transformers would be required. The M3N1 range of current transformers offers primary currents between 60-630A with 5A secondaries with up to class 0.5 accuracy performance.

Specifications

System voltage	720V maximum
Test voltage	3kV for 1 minute
System frequency	50Hz or 60Hz
Primary ratings	60A to 630A
Short circuit thermal current	60 x rated primary current (Ith): for 1 sec
Overload withstand	1.2 x rated current continuously
Rated dynamic current	= 2.55 x Ith
Secondary terminals	M4 screw terminals
Enclosure	Flame retardant grade classified UL 94V-0
Aperture holes centres	25, 35, 45mm
Operating temperature	-20°C to +85°C
Accuracy	Class 0.5, 1, 3
Mounting hardware	Plug-in metal feet for wall or base mounting Busbar and DIN-rail mounting
Compliant with	IEC/EN 60044-1

Features

- Cost effective three-phase moulded case
- Ratio's ranging from 60/5 to 630/5
- Integrated wire sealable terminal cover
- Busbar, DIN-rail and metal feet mounting hardware supplied
- Combined M4 posi/slot screw

Benefits

- Isolated output for safety
- Faster installation
- Compact size
- Ex-stock delivery

Applications


- Switchgear
- Distribution systems
- Generator sets
- Control panels

Product codes

Part number	Ratio	Burden VA against class Index			Aperture (mm)
		Class 0.5	Class 1	Class 3	
M3N1-25-60/5	60/5	-	1	2	3 @ 15 x 25mm
M3N1-25-100/5	100/5	-	1.5	2.5	3 @ 15 x 25mm
M3N1-25-125/5	125/5	-	1.5	2.5	3 @ 15 x 25mm
M3N1-25-150/5	150/5	1.5	1.5	2.5	3 @ 15 x 25mm
M3N1-25-160/5	160/5	1.5	1.5	2.5	3 @ 15 x 25mm
M3N1-35-100/5	100/5	-	1.5	2	3 @ 21 x 25mm
M3N1-35-125/5	125/5	-	1.5	2.5	3 @ 21 x 25mm
M3N1-35-150/5	150/5	-	1.5	2.5	3 @ 21 x 25mm
M3N1-35-160/5	160/5	1.5	1.5	2.5	3 @ 21 x 25mm
M3N1-35-200/5	200/5	1.5	1.5	2.5	3 @ 21 x 25mm
M3N1-35-250/5	250/5	1.5	1.5	2.5	3 @ 21 x 25mm
M3N1-45-250/5	250/5	1.5	1.5	2.5	3 @ 31 x 31mm
M3N1-45-300/5	300/5	2.5	2.5	3.75	3 @ 31 x 31mm
M3N1-45-400/5	400/5	2.5	2.5	3.75	3 @ 31 x 31mm
M3N1-45-500/5	500/5	2.5	2.5	3.75	3 @ 31 x 31mm
M3N1-45-600/5	600/5	2.5	2.5	3.75	3 @ 31 x 31mm
M3N1-45-630/5	630/5	2.5	2.5	3.75	3 @ 31 x 31mm



Dimensions

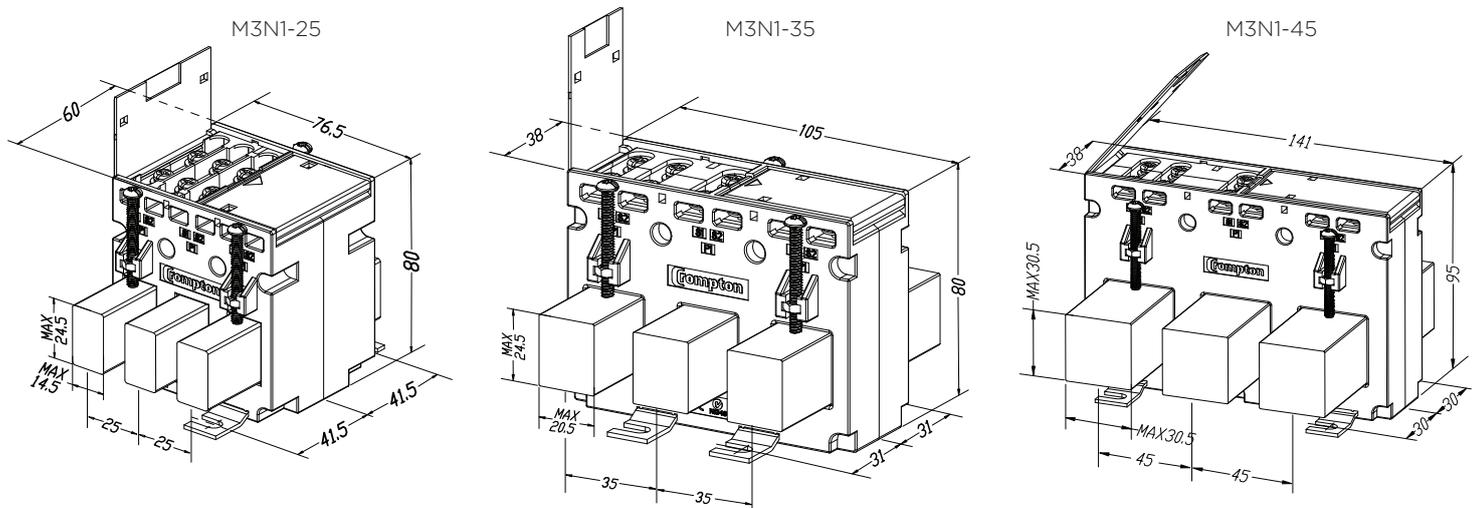

While TE has made every reasonable effort to ensure the accuracy of the information in this catalog, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications. TE connectivity (logo) and TE Connectivity are trademarks of the TE Connectivity Ltd. family of companies. Crompton is a trademark of Crompton Parkinson and is used by TE Connectivity Ltd. under a licence. Other logos, product and Company names mentioned herein may be trademarks of their respective owners.

TE Energy - innovative and economical solutions for the electrical power industry: cable accessories, connectors & fittings, insulators & insulation, surge arresters, switching equipment, street lighting, power measurement and control.

Tyco Electronics UK Ltd
TE Energy
Freebournes Road
Witham, Essex CM8 3AH

Phone: +44 (0)870 870 7500
Fax: +44 (0)870 240 5287
Email: electrical@te.com

www.crompton-instruments.com
<http://energy.te.com>

