



Crompton Instruments ANSI Switchboard Meters

Crompton Instruments

ANSI SWITCHBOARD METERS

An extensive range of analog and digital/analog meters in the 4½" ANSI case style. Meters utilize a robust pivot and jewel movement design, and provide 1% accuracy for all RMS AC and DC ranges. The range offers various customized options and features UL and CE Listings and Certifications.



Contents

| | Page |
|---|---------|
| ANSI Switchboard Meters General Specs | 2 - 3 |
| AC DC Ammeters, Voltmeters and Frequency Meters General Specs | 4 |
| RMS Reading AC Ammeters | 5 |
| RMS Reading AC Voltmeters | 6 |
| Expanded Scale AC Voltmeters | 6 |
| DC Ammeters | 7 |
| DC Voltmeters | 8 |
| Frequency Meters | 8 |
| AC Wattmeters & AC VArmeters General Specifications | 9 |
| AC Wattmeters VArmeter Scale Selector Guide | 10 - 11 |
| AC Wattmeters | 12 |
| AC VArmeters | 13 |
| DC Transducer Indicators | 13 |
| Elapsed Time Meters | 14 |
| AC Phase Sequence Phase Failure | 14 |
| DC Indicators for Tachometer Generators | 14 |
| AC Power Factor Meters | 15 |
| LED Digital Analog Combination General Specifications | 16 |
| LED Digital Analog AC Voltmeters | 17 |
| LED Digital Analog AC Ammeters | 18 - 19 |
| LED Digital Analog DC Voltmeters | 20 |
| LED Digital Analog DC Ammeters | 21 |
| Switchboard Meter Options | 22 |

Features

- Rugged polycarbonate
- Class 1 accuracy

Benefits

- Meets all requirements of ANSI C39.1
- Customize options and features
- Parallax error-free platform dials

Applications

- Switchgear
- Distribution Systems
- Generator Sets
- Control Panels
- Energy Management
- Building Management
- Utility Power Monitoring
- Process Control
- Motor Control

Certifications



ANSI Switchboard Meters

High quality range of switchboard instruments with Class 1 accuracy and which complies with American ANSI-C39.1 (1981) specifications. Available in 4 1/2" case size, the rugged design characteristics meet the needs of the most demanding environmental applications. This extensive range of analog and digital/analog meters utilizes high shock and provides 1% accuracy for all RMS AC and DC ranges. The range offers various customized options and features.

Description

Our Switchboard Meter series offers two case types; models 007 and 078.

Model 078 is high shock hermetically sealed and all models have heavy gauge pressed steel cases. Mounting is by four integral studs. Model 078 has a die-cast bezel and a projecting moulded toughened glass window, which incorporates a gas tight zero adjuster.

Model 007 is a one piece flame retardant polycarbonate moulding with a black matte finished bezel area, and a specially contoured window to minimize reflection from adjacent light sources.

Scales are 240° moving iron and 250° moving coil with parallax error-free platform dials. Standard dials are white matte with black printed scales and bar knife-edge pointers.

Specifications

| | |
|----------------------------------|--|
| Performance | ANSI C39.1 (1981) |
| Accuracy | Class 1 |
| Terminals | 10 - 32 UNF terminals |
| Response time | Approximately 2.5 seconds to full scale (007 and 078) |
| Dielectric voltage | Withstand test 2.3 kV for 1 minute |
| Standard calibration | 23°C |
| Operating temperature | 0°C to +60°C. Model 078: -40°C to +70°C |
| Storage temperature | -10°C to +50°C |
| Extreme temperature range | -20°C to +65°C |
| Enclosure integrity | Model 007 to IP54 (NEMA 3S) splash proof, IP55 (NEMA 4) hoseproof is an optional extra Model 078 to IP67 (NEMA 6 and 6P) |
| Fixing on panel | 4 integral 1/4 -28 UNF fixing studs |
| Certifications | c-UL-us, CE |

Dimensions (in inches)

| Model | Panel Cutout | | | Rear View | | Side View | | |
|---------------------------|--------------|------|------|-----------|------|-----------|------|------|
| | Dia | A | B | C | D | E | F | G |
| 007 (Amps, Volts & Freq.) | 4.06 | 3.37 | 1.69 | 4.31 | 0.65 | 2.41 | - | 4.05 |
| 007 Others | 4.06 | 3.37 | 1.69 | 4.31 | 0.65 | - | 0.91 | 4.05 |
| 078 | 4.06 | 3.37 | 1.69 | 4.31 | 0.63 | - | 0.91 | 4.05 |


Dimension E on 007 others and 078 products varies with measured parameter. See product code on following page.

Dimension F on 078 (Amps, Volts & Freq.) products is included with dimension E.


1-4 Fixing holes Ø 8mm. 2-1/4-28 UNF fixing studs. 3-10-32 UNF terminals.



007 Power and 078

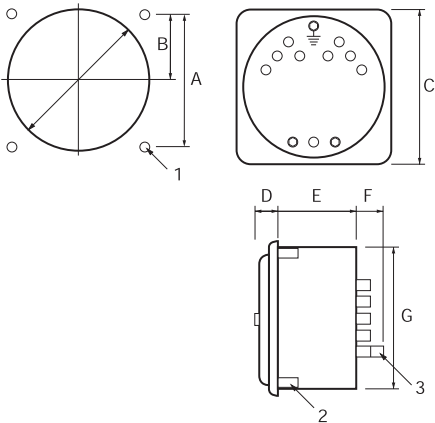

007 AMPs | Volts | Frequency Only

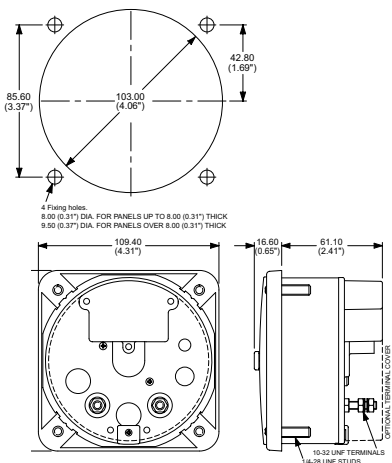

Features

- Rugged pivot and jewel movement
- Class 1 accuracy

Benefits

- Meets all the requirements of ANSI-C39.1 (1981)
- Parallax error-free platform dials
- Bump, shock and vibration proof
- Customized options and features

Applications

- Switchgear
- Distribution systems
- Generator sets
- Control panels
- Energy management
- Building management
- Utility power monitoring
- Process control
- Motor control

Certifications



| Type of instrument | Ranges | Dimension E | | Product code |
|--|----------------------------------|-------------|-----|-------------------------|
| | | 007 | 078 | |
| AC rectified ammeter | 1 - 30A | 56 | 86 | 007/078-05B |
| AC rectified voltmeter | 30 - 800V | 56 | 86 | 007/078-05W |
| AC voltmeter expanded scale | 110 - 130V | 86 | 86 | 007/078-05Y |
| AC RMS ammeter | 1 - 30A | 56 | 86 | 007/078-05F |
| AC RMS voltmeter | 150 - 750V | 56 | 86 | 007/078-05G |
| Elapsed time meter (99999.99) | 50 or 60Hz / 100 - 440V* and DC | 56 | 56 | 007/078-155/156/077-151 |
| Frequency meter | 50, 60 | 86 | 86 | 007/078-41L |
| AC wattmeter or VARmeter | 0.2 - 10A/100 - 440V* | 132 | 132 | 007/078-21 or 31 |
| LED synchroscope only | 63.5 - 480V**** | 86 | - | 077-14A |
| LED synchroscope and synchro check relay | 63.5 - 480V**** | 86 | - | 077-14 L/G/D/U |
| Phase sequence indicator | 100 - 150, 151 - 300, 301 - 500V | 56 | - | 077-12P |
| Transducer operated indicator | 1, 5, 10, 20, or 4/20mA | 56 | 56 | 007/078-05 |
| DC ammeter moving coil | 200QA - 30A 56 | 56 | 56 | 007/078-05A |
| DC voltmeter moving coil | 50mV - 600V 56 | 56 | 56 | 007/078-05V |
| 240° phase angle power factor | 1 or 5A, 100 - 400V, 50, 60 | 132 | 132 | 007/078-42 |
| DIGI/Analog AC ammeter | 1mA - 10A | 86 | - | 007-DIB |
| DIGI/Analog AC voltmeter | 200mV - 600V | 86 | - | 007-DIW |
| DIGI/Analog DC ammeter | 1mA - 1A | 86 | - | 007-DIA |
| DIGI/Analog DC voltmeter | 20mV - 600V | 86 | - | 007-DIV |
| DIGI/Analog transducer indicator | DC mA | 86 | - | 007-DIT |
| DIGI/Analog tachometer | AC or DC rated | 86 | - | 007-DI2 |

* 100-440V = (100/125, 200/250, 380/440).

**100-440V = (100/125, 200/250, 380/440). Frequencies 45/55, 55/65, 45/65, 46/54, 50/70, 58/62, 56/64.


****Nominal voltage to be specified.

AC and DC Ammeters, Voltmeters and Frequency Meters

This range of self contained, pivot and jewel moving iron meters feature 250° linear scale. AC instruments are available with true RMS converting circuit or RMS compensated rectifier. While types of frequency meters can be damaged by transient supply voltage spike, Crompton Instruments 007-41 frequency meters can withstand, without damage, 10 successive transient spikes of 1250 volts. The range offers c-UL-us certification.



Fig. AA 007-05/007-41



Specifications-General

Manufactured in accordance with American National Standards ANSI C39.1, (1981)

| | |
|----------------------------------|---|
| Accuracy | ±1% full scale at 23°C (73°F) |
| Scales arc | 250° full scale deflection |
| Scale length | 007 and 078: 175.2 mm (6.9") |
| Scale plate | 2 piece, platform type |
| Response time | 007 and 078: Approximately 2.5 seconds to full scale |
| Operating temperature | 0 to 40°C (32 to 104°F) |
| Storage temperature | -10 to +50°C (14 to 122°F) |
| Extreme temperature range | -20° to +65°C (-4° to 149°F) |
| Terminals | Standard 10-32 UNF stud. M5 screw clamp is optional |
| Dielectric withstand | 2300V AC for 1 minute between electrical circuit and case |
| Overshoot | 33% maximum |
| Enclosure code | 007: IP54, optional IP55 and 078: IP67 |
| Certification | c-UL-us |

Specifications-Ammeters and Voltmeters

| | |
|------------------------|--|
| Overload rating | AC ammeters - 2 x continuous, 50 x for 1 second AC voltmeters and frequency meters - 1.2 x continuous DC ammeters - 2 x continuous 10 x for 1 second DC voltmeters - 1.2 x continuous |
| Frequency range | AC calibration 50/60Hz ±20% |

Specifications-Frequency Meters

| | |
|--|--|
| Response time | 3 seconds maximum |
| External temperature influence | 0.6 times accuracy maximum with ±10°C from reference temperature |
| External field influence | 2.0 times accuracy maximum with 0.5m T field |
| Acceptable input harmonic influence | up to 30% distortion |

| Maximum Frequency - Hz | Center Scale - Hz | Error in Hz |
|------------------------|-------------------|-------------|
| 45-55 | 50 | 0.15 |
| 46-54 | 50 | 0.15 |
| 45-65 | 55 | 0.25 |
| 50-70 | 60 | 0.25 |
| 55-65 | 60 | 0.15 |
| 56-64 | 60 | 0.15 |

RMS Reading AC Ammeters

Product Codes - Self Contained 40/70Hz - Accuracy $\pm 1\%$, 60Hz***

| Rating | Scaling* | 4 1/2" square flange | |
|--------|----------|--------------------------|-----------------------------------|
| | | Std. case catalog number | Std. case hi-shock catalog number |
| 1A | 0-1A | •007-05FA-LALA-C7 | 078-05FJ-LALA-C6 |
| 1.5A | 0-1.5A | •007-05FA-LCLC-C7 | 078-05FJ-LCLC-C6 |
| 2A | 0-2A | •007-05FA-LELE-C7 | 078-05FJ-LELE-C6 |
| 3A | 0-3A | •007-05FA-LJLJ-C7 | 078-05FJ-LJLJ-C6 |
| 5A | 0-5A | •007-05FA-LSLS-C7 | 078-05FJ-LSLS-C6 |
| 7.5A | 0-7.5A | •007-05FA-MFMF-C7 | 078-05FJ-MFMF-C6 |
| 10A | 0-10A | •007-05FA-MTMT-C7 | 078-05FJ-MTMT-C6 |
| 15A | 0-15A | •007-05FA-NDND-C7 | 078-05FJ-NDND-C6 |
| 20A | 0-20A | •007-05FA-NGNG-C7 | 078-05FJ-NGNG-C6 |
| 30A | 0-30A | •007-05FA-NLNL-C7 | 078-05FJ-NLNL-C6 |

For AC rectified non-RMS compensated meter, please replace the -05F in the product code with -05B.

Product Codes - Transformer Rated 40/70Hz - Burden 0.3VA***

| | | | |
|----|---------|-------------------|------------------|
| 5A | 0-10A | •007-05FA-LSMT-C7 | 078-05FJ-LSMT-C6 |
| 5A | 0-15A | •007-05FA-LSND-C7 | 078-05FJ-LSND-C6 |
| 5A | 0-20A | •007-05FA-LSNG-C7 | 078-05FJ-LSNG-C6 |
| 5A | 0-25A | •007-05FA-LSNJ-C7 | 078-05FJ-LSNJ-C6 |
| 5A | 0-30A | •007-05FA-LSNL-C7 | 078-05FJ-LSNL-C6 |
| 5A | 0-40A | •007-05FA-LSNP-C7 | 078-05FJ-LSNP-C6 |
| 5A | 0-50A | •007-05FA-LSNT-C7 | 078-05FJ-LSNT-C6 |
| 5A | 0-75A | •007-05FA-LSPB-C7 | 078-05FJ-LSPB-C6 |
| 5A | 0-100A | •007-05FA-LSPK-C7 | 078-05FJ-LSPK-C6 |
| 5A | 0-150A | •007-05FA-LSPZ-C7 | 078-05FJ-LSPZ-C6 |
| 5A | 0-200A | •007-05FA-LSRL-C7 | 078-05FJ-LSRL-C6 |
| 5A | 0-250A | •007-05FA-LSRS-C7 | 078-05FJ-LSRS-C6 |
| 5A | 0-300A | •007-05FA-LSRX-C7 | 078-05FJ-LSRX-C6 |
| 5A | 0-400A | •007-05FA-LSSC-C7 | 078-05FJ-LSSC-C6 |
| 5A | 0-500A | •007-05FA-LSSF-C7 | 078-05FJ-LSSF-C6 |
| 5A | 0-600A | •007-05FA-LSSJ-C7 | 078-05FJ-LSSJ-C6 |
| 5A | 0-800A | •007-05FA-LSSN-C7 | 078-05FJ-LSSN-C6 |
| 5A | 0-1000A | •007-05FA-LSSS-C7 | 078-05FJ-LSSS-C6 |
| 5A | 0-1200A | •007-05FA-LSSU-C7 | 078-05FJ-LSSU-C6 |
| 5A | 0-1500A | •007-05FA-LSTC-C7 | 078-05FJ-LSTC-C6 |
| 5A | 0-1600A | •007-05FA-LSTE-C7 | 078-05FJ-LSTE-C6 |
| 5A | 0-2000A | •007-05FA-LSTM-C7 | 078-05FJ-LSTM-C6 |
| 5A | 0-2500A | •007-05FA-LSTU-C7 | 078-05FJ-LSTU-C6 |
| 5A | 0-3000A | •007-05FA-LSUA-C7 | 078-05FJ-LSUA-C6 |
| 5A | 0-4000A | •007-05FA-LSUE-C7 | 078-05FJ-LSUE-C6 |
| 5A | 0-5000A | •007-05FA-LSUJ-C7 | 078-05FJ-LSUJ-C6 |
| 5A | 0-6000A | •007-05FA-LSUP-C7 | 078-05FJ-LSUP-C6 |
| 5A | 0-7000A | •007-05FA-LSUS-C7 | 078-05FJ-LSUS-C6 |
| 5A | 0-8000A | •007-05FA-LSUW-C7 | 078-05FJ-LSUW-C6 |

For AC rectified non-RMS compensated meter, please replace the -05F in the product code with -05B.

* Other scales are available.

*** For case types 007/078 use 10-32 UNF terminals.

• c-UL-us certified.



AC Ammeter

RMS Reading AC Voltmeters

Product Codes - Self Contained 50/60Hz $\pm 20\%$ - Accuracy $\pm 1\%^{***}$



AC Voltmeter

| Rating | Scaling* | 4 1/2" square flange | |
|--------|----------|--------------------------|-----------------------------------|
| | | Std. case catalog number | Std. case hi-shock catalog number |
| 150V | 0-150V | •007-05GA-PZPZ-C7 | 078-05GJ-PZPZ-C6 |
| 250V | 0-250V | •007-05GA-RSRS-C7 | 078-05GJ-RSRS-C6 |
| 300V | 0-300V | •007-05GA-RXRX-C7 | 078-05GJ-RXRX-C6 |
| 500V | 0-500V | •007-05GA-SFSF-C7 | 078-05GJ-SFSF-C6 |
| 600V | 0-600V | •007-05GA-SJSJ-C7 | 078-05GJ-SJSJ-C6 |
| 750V | 0-750V | 007-05GA-SMSM-C7 | 078-05GJ-SMSM-C6 |

For AC rectified non-RMS compensated meter, please replace the -05G in the product code with -05W.

Product Codes - Transformer Rated 50/60Hz - Accuracy $\pm 1\%$
0.8VA @ 150V^{***}

| | | | |
|------|---------|-------------------|------------------|
| 150V | 0-300V | •007-05GA-PZRX-C7 | 078-05GJ-PZRX-C6 |
| 150V | 0-600V | •007-05GA-PZSJ-C7 | 078-05GJ-PZSJ-C6 |
| 150V | 0-750V | •007-05GA-PZSM-C7 | 078-05GJ-PZSM-C6 |
| 150V | 0-3000V | •007-05GA-PZUA-C7 | 078-05GJ-PZUA-C6 |
| 150V | 0-5250V | •007-05GA-PZUL-C7 | 078-05GJ-PZUL-C6 |
| 150V | 0-6000V | •007-05GA-PZUP-C7 | 078-05GJ-PZUP-C6 |
| 150V | 0-9000V | •007-05GA-PZUY-C7 | 078-05GJ-PZUY-C6 |
| 150V | 0-15kV | •007-05GA-PZWC-C7 | 078-05GJ-PZWC-C6 |
| 150V | 0-18kV | •007-05GA-PZWD-C7 | 078-05GJ-PZWD-C6 |
| 150V | 0-45kV | •007-05GA-PZWJ-C7 | 078-05GJ-PZWJ-C6 |
| 250V | 0-600V | •007-05GA-RSSJ-C7 | 078-05GJ-RSSJ-C6 |

For AC rectified non-RMS compensated meter, please replace the -05G in the product code with -05W.

Product Codes - Expanded Scale - Moving Coil Zener Diode ^{***}
Accuracy $\pm 0.3\%$ of Mid-scale Value Self Contained, 20-1000Hz

| | | | |
|----------|------------|------------------|------------------|
| 110-130V | 110-130V | 007-05YA-PNPN-C6 | 078-05YJ-PNPN-C6 |
| 110-130V | To suit PT | 007-05YA-PN**-C6 | 078-05YJ-PN**-C6 |

- * Other scales are available.
- ** Scaling information provided at time of order.
- *** For case types 007/078 use 10-32 UNF terminals.
- c-UL-us listed.



AC Voltmeter - Expanded Scale

DC Ammeters

Product Codes - Self Contained - Accuracy $\pm 1\%$ ***

| Rating | Scaling* | 4 1/2" square flange | |
|---------|----------|--------------------------|-----------------------------------|
| | | Std. case catalog number | Std. case hi-shock catalog number |
| 0-200QA | 0-200QA | •007-05AA-EAEA | 078-05AJ-EAEA |
| 0-300QA | 0-300QA | •007-05AA-EEEE | 078-05AJ-EEEE |
| 0-500QA | 0-500QA | •007-05AA-EMEM | 078-05AJ-EMEM |
| 0-800QA | 0-800QA | •007-05AA-EWEW | 078-05AJ-EWEW |
| 0-1mA | 0-1mA | •007-05AA-FAFA | 078-05AJ-FAFA |
| 0-2mA | 0-2mA | •007-05AA-FGFG | 078-05AJ-FGFG |
| 0-5mA | 0-5mA | •007-05AA-FXFX | 078-05AJ-FXFX |
| 0-10mA | 0-10mA | •007-05AA-HAHA | 078-05AJ-HAHA |
| 0-20mA | 0-20mA | •007-05AA-HFHF | 078-05AJ-HFHF |
| 0-30mA | 0-30mA | •007-05AA-HMHM | 078-05AJ-HMHM |
| 0-50mA | 0-50mA | •007-05AA-HXHY | 078-05AJ-HXHY |
| 0-100mA | 0-100mA | •007-05AA-JRJR | 078-05AJ-JRJR |
| 0-200mA | 0-200mA | •007-05AA-KAKA | 078-05AJ-KAKA |
| 0-300mA | 0-300mA | •007-05AA-KGKG | 078-05AJ-KGKG |
| 0-500mA | 0-500mA | •007-05AA-KMKM | 078-05AJ-KMKM |
| 0-800mA | 0-800mA | •007-05AA-KWKW | 078-05AJ-KWKW |
| 0-1A | 0-1A | •007-05AA-LALA | 078-05AJ-LALA |
| 0-5A | 0-5A | •007-05AA-LSLS | 078-05AJ-LSLS |
| 0-10A | 0-10A | •007-05AA-MTMT | 078-05AJ-MTMT |
| 0-15A | 0-15A | •007-05AA-NDND | 078-05AJ-NDND |
| 0-20A | 0-20A | •007-05AA-NGNG | 078-05AJ-NGNG |
| 0-30A | 0-30A | •007-05AA-NLNL | 078-05AJ-NLNL |



DC Ammeter

Product Codes - Millimeters - Suppressed Zero, No Zero Adjust Unless Specified

| | | | |
|---------|---------|----------------|---------------|
| 1/5mA | To Suit | •007-05RA-GM** | 078-05RJ-GM** |
| 4/20mA | To Suit | •007-05RA-HG** | 078-05RJ-HG** |
| 10/50mA | To Suit | •007-05RA-HZ** | 078-05RJ-HZ** |

Product Codes - Shunt Rated - Accuracy $\pm 1\%$ ***

| Rating | Scaling* | 4 1/2" square flange | |
|-------------|----------------------|--------------------------|-----------------------------------|
| | | Std. case catalog number | Std. case hi-shock catalog number |
| 50mV | To suit shunt rating | •007-05AA-EY** | 078-05AJ-EY** |
| 50-0-50mV | | •007-05CA-GB** | 078-05CJ-GB** |
| 100mV | | •007-05AA-GB** | 078-05AJ-GB** |
| 100-0-100mV | | •007-05CA-GM** | 078-05CJ-GM** |

Product Codes - Zero Left For Use With 50 mV Shunts and 0.05 Ohm Shunt Leads***and ****

| | | | |
|------|---------|----------------|---------------|
| 50mV | 0-15A | •007-05AA-EYND | 078-05AJ-EYND |
| 50mV | 0-20A | •007-05AA-EYNG | 078-05AJ-EYNG |
| 50mV | 0-30A | •007-05AA-EYNL | 078-05AJ-EYNL |
| 50mV | 0-40A | •007-05AA-EYNP | 078-05AJ-EYNP |
| 50mV | 0-75A | •007-05AA-EYPB | 078-05AJ-EYPB |
| 50mV | 0-100A | •007-05AA-EYPK | 078-05AJ-EYPK |
| 50mV | 0-150A | •007-05AA-EYPZ | 078-05AJ-EYPZ |
| 50mV | 0-200A | •007-05AA-EYRL | 078-05AJ-EYRL |
| 50mV | 0-300A | •007-05AA-EYRX | 078-05AJ-EYRX |
| 50mV | 0-400A | •007-05AA-EYSC | 078-05AJ-EYSC |
| 50mV | 0-500A | •007-05AA-EYSF | 078-05AJ-EYSF |
| 50mV | 0-750A | •007-05AA-EYSM | 078-05AJ-EYSM |
| 50mV | 0-1000A | •007-05AA-EYSS | 078-05AJ-EYSS |
| 50mV | 0-1200A | •007-05AA-EYSU | 078-05AJ-EYSU |
| 50mV | 0-1500A | •007-05AA-EYTC | 078-05AJ-EYTC |
| 50mV | 0-2000A | •007-05AA-EYTM | 078-05AJ-EYTM |
| 50mV | 0-3000A | •007-05AA-EYUA | 078-05AJ-EYUA |

- c-UL-us certified.
Specify shunt lead resistance value if in excess of 0.05 ohms for calibration purposes.
DC shunt rated ammeters have thermistor circuit ambient temperature compensation.
Separate shunt and shunt leads are not included.
- * Other scales are available.
- ** Specify scale required.
- *** Other mV ratings and scale options available upon request.
- **** For case types 007/078 use 10-32 UNF terminals.

DC Voltmeters

Product Codes - Sensitivity 1000 Ohms / Volt - Accuracy $\pm 1\%$ ***



DC Voltmeter

| Rating | Scaling* | 4 1/2" square flange | |
|------------|----------|--------------------------|-----------------------------------|
| | | Std. case catalog number | Std. case hi-shock catalog number |
| 500MV-800V | To suit | •007-05VA-** | 078-05VJ-** |
| 0-15V | 0-15V | •007-05VA-NDND | 078-05VJ-NDND |
| 0-30V | 0-30V | •007-05VA-NLNL | 078-05VJ-NLNL |
| 0-50V | 0-50V | •007-05VA-NTNT | 078-05VJ-NTNT |
| 0-75V | 0-75V | •007-05VA-PBPB | 078-05VJ-PBPB |
| 0-150V | 0-150V | •007-05VA-PZPZ | 078-05VJ-PZPZ |
| 0-300V | 0-300V | •007-05VA-RXRX | 078-05VJ-RXRX |
| 0-400V | 0-400V | •007-05VA-SCSC | 078-05VJ-SCSC |
| 0-500V | 0-500V | •007-05VA-SFSF | 078-05VJ-SFSF |
| 0-600V | 0-600V | •007-05VA-SJSJ | 078-05VJ-SJSJ |
| 0-750V | 0-750V | 007-05VA-SMSM | 078-05VJ-SMSM |
| 0-800V | 0-800V | 007-05VA-SNSN | 078-05VJ-SNSN |

Product Codes - Zero Center - Sensitivity 2000 Ohms / Volt Accuracy $\pm 1\%$ ***

| | | | |
|------------|------------|----------------|---------------|
| 150-0-150V | 150-0-150V | •007-05NA-RXRX | 078-05NJ-RXRX |
| 300-0-300V | 300-0-300V | •007-05NA-SJSJ | 078-05NJ-SJSJ |
| 500-0-500V | 500-0-500V | •007-05NA-SSSS | 078-05NJ-SSSS |
| 600-0-600V | 600-0-600V | •007-05NA-SUSU | 078-05NJ-SUSU |

Frequency Meters

Product Codes - 120V Self Contained***



Frequency Meter

| Ratings | Scaling* | 4 1/2" square flange | |
|--------------|----------|--------------------------|-----------------------------------|
| | | Std. case catalog number | Std. case hi-shock catalog number |
| 50Hz +/-0.15 | 45-55Hz | •007-41LA-PNAG-AG | 078-41LJ-PNAG-AG |
| 50Hz +/-0.15 | 46-54Hz | •007-41LA-PNAH-AH | 078-41LJ-PNAH-AH |
| 50Hz +/-0.25 | 45-65Hz | •007-41LA-PNAJ-AJ | 078-41LJ-PNAJ-AJ |
| 60Hz +/-0.25 | 50-70Hz | •007-41LA-PNAL-AL | 078-41LJ-PNAL-AL |
| 60Hz +/-0.15 | 55-65Hz | •007-41LA-PNAN-AN | 078-41LJ-PNAN-AN |
| 60Hz +/-0.15 | 56-64Hz | •007-41LA-PNAO-AO | 078-41LJ-PNAO-AO |
| 60Hz +/-0.08 | 58-62Hz | •007-41LA-PNAT-AT | 078-41LJ-PNAT-AT |

For alternative voltage rating 200-250V, use code RN instead of PN.
For alternative voltage rating 380-480V, case types 007/078 use code SE instead of PN.

10-32 UNF terminals.
* Other scales are available.
** Specify scale required.
***For case types 007/078 use 10-32 UNF terminals.
• c-UL-us certified.

AC Wattmeters and VArmeters



The Crompton Instruments Switchboard series of AC Wattmeters and VArmeters incorporate a DC moving coil, pivot and jewel indicator with a micro-circuit watt transducer PCB to read power on single or three-phase systems. The most frequently selected wattmeter scale marking for common current and voltage transformers are listed on the following pages. In addition, these instruments may be supplied with zero-left or center-zero scale.

Scaling

Wattmeter and VArmeter current circuits should have equal carrying capacity because they are frequently connected in series. This means that the sum of the left and right end-scale values of the VArmeters should be equal to or greater than the full scale value of the Wattmeter (or have higher end-scale values if the instruments are center or offset-zero). Instruments measuring 10,000 kilowatts and over are marked in megawatts. Center-zero or offset-zero Watt and VArmeters are marked "IN" for left deflection and "OUT" for right deflection. On ordering, Wattmeter and VArmeter scales will be calculate, the nearest preferred scale will be offered from the charts on the following pages. Custom scales are available but at an extra cost.

Calibration

For full load value of Watts or VAr, assuming unity power factor:

1-phase 2-wire Watts = amps x volts

3-phase 3-wire Watts = amps x line-to-line volts x $\sqrt{3}$

3-phase 4-wire Watts = amps x line-to-neutral volts x 3

Minimum scale values are obtained by multiplying resultant Watts, using the above formula x 0.7 and selecting next higher standard scale.

For maximum scale value, multiply x 1.3 and select the next lowest standard.

If scale calculates to an exact listed value, use this value rather than the next higher or lower value.

Note: When ordering Wattmeters and VArmeters, please specify CT ratio, VT ratio and required scale.

Specifications

| | |
|-------------------------------|--|
| Burden per element | Current circuit: 2VA Voltage Circuit: 1VA |
| Accuracy | Class 1.0 |
| Ambient range | 0° to $\pm 60^\circ$ (32° to 104°F) std. calibration 20°C (68°F) |
| Ambient influence | 0.05% per 1°C maximum |
| Overloads-current | 10 x rating for 5 seconds, 1.2 x continuously |
| Voltage influence | 2 x rating for 5 seconds, 1.2 x continuously voltage Accuracy maintained, 80 - 110% rated voltage |
| Power factor influence | Accuracy maintained, 0.1 lag to 0.1 lead |
| Enclosure code | 007 IP54 optional IP55 078 IP67 |
| Response time | 007 and 078 approximately 2.5 seconds |
| Dielectric withstand | Live parts to case including panel 2600V RMS for 1 minute |

Wattmeter | VArmeter Scale Selector Guide

| Primary potential transformer voltage system | 120 | 208 | 240 | 480 | 600 | 2400 | 3600 | 4200 | 4800 | 6000 | 7200 | 8400 |
|--|-------|----------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|
| | (1:1) | (1.73:1) | (2:1) | (4:1) | (5:1) | (20:1) | (30:1) | (35:1) | (40:1) | (50:1) | (60:1) | (70:1) |
| 3-phase 3-wire (L-L) system voltage | 120 | 208 | 240 | 480 | 600 | 2400 | 3600 | 4200 | 4800 | 6000 | 7200 | 8400 |
| 3-phase 4-wire (L-N) current transformer | 69 | 120 | 139 | 277 | 347 | 1390 | 2100 | 2400 | 2770 | 3500 | 4160 | 4800 |

| | | | | | | | | | | | | | |
|-----------------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| RATIO 25/5 (5:1) | Normal | 5KW | 10KW | 10KW | 20KW | 25KW | 100KW | 150KW | 175KW | 200KW | 250KW | 300KW | 350KW |
| | Max. | 6 | 10 | 12 | 25 | 30 | 120 | 200 | 200 | 250 | 300 | 400 | 450 |
| | Min. | 3 | 5 | 6 | 12.5 | 15 | 60 | 100 | 100 | 125 | 150 | 200 | 225 |
| RATIO 50/5 (10:1) | Normal | 10KW | 20KW | 20KW | 40KW | 50KW | 200KW | 300KW | 350KW | 400KW | 500KW | 600KW | 700KW |
| | Max. | 12 | 20 | 25 | 50 | 60 | 250 | 400 | 450 | 500 | 600 | 800 | 900 |
| | Min. | 6 | 10 | 12.5 | 25 | 30 | 125 | 200 | 250 | 250 | 300 | 400 | 450 |
| RATIO 75/5 (15:1) | Normal | 15KW | 25KW | 30KW | 60KW | 75KW | 300KW | 500KW | 500KW | 600KW | 750KW | 900KW | 1000KW |
| | Max. | 20 | 30 | 40 | 80 | 100 | 400 | 600 | 700 | 800 | 1000 | 1200 | 1200 |
| | Min. | 10 | 15 | 20 | 40 | 50 | 200 | 300 | 350 | 400 | 500 | 600 | 600 |
| RATIO 100/5 (20:1) | Normal | 20KW | 30KW | 40KW | 75KW | 100KW | 400KW | 600KW | 700KW | 800KW | 1000KW | 1200KW | 1200KW |
| | Max. | 25 | 40 | 50 | 100 | 120 | 500 | 800 | 900 | 1000 | 1200 | 1500 | 1500 |
| | Min. | 12.5 | 20 | 25 | 50 | 60 | 250 | 400 | 450 | 500 | 600 | 750 | 750 |
| RATIO 150/5 (30:1) | Normal | 30KW | 50KW | 50KW | 100KW | 150KW | 600KW | 800KW | 1000KW | 1200KW | 1500KW | 1800KW | 2000KW |
| | Max. | 40 | 70 | 75 | 150 | 200 | 800 | 1200 | 1200 | 1500 | 2000 | 2400 | 2500 |
| | Min. | 20 | 35 | 35 | 75 | 100 | 400 | 600 | 600 | 750 | 1000 | 1000 | 1250 |
| RATIO 200/5 (40:1) | Normal | 40KW | 75KW | 75KW | 150KW | 200KW | 800KW | 1200KW | 1200KW | 1500KW | 2000KW | 2500KW | 3000KW |
| | Max. | 50 | 80 | 100 | 200 | 250 | 1000 | 1500 | 1500 | 2000 | 2500 | 3000 | 3500 |
| | Min. | 25 | 40 | 50 | 100 | 125 | 500 | 750 | 750 | 1000 | 1250 | 1500 | 1500 |
| RATIO 300/5 (60:1) | Normal | 70KW | 100KW | 100KW | 200KW | 300KW | 1200KW | 1500KW | 2000KW | 2500KW | 3000KW | 3500KW | 4500KW |
| | Max. | 75 | 120 | 150 | 300 | 400 | 1500 | 2000 | 2500 | 3000 | 4000 | 4000 | 5000 |
| | Min. | 35 | 60 | 75 | 150 | 200 | 750 | 1000 | 1250 | 1500 | 2000 | 2000 | 2500 |
| RATIO 400/5 (80:1) | Normal | 75KW | 125KW | 150KW | 300KW | 400KW | 1500KW | 2500KW | 3000KW | 3000KW | 4000KW | 5000KW | 6000KW |
| | Max. | 100 | 150 | 200 | 400 | 500 | 2000 | 3000 | 3600 | 4000 | 5000 | 6000 | 7000 |
| | Min. | 50 | 75 | 100 | 200 | 250 | 1000 | 1500 | 1500 | 2000 | 2500 | 3000 | 3500 |
| RATIO 600/5 (120:1) | Normal | 125KW | 200KW | 200KW | 450KW | 600KW | 2000KW | 3000KW | 4000KW | 5000KW | 6000KW | 7500KW | 8000KW |
| | Max. | 150 | 250 | 300 | 600 | 800 | 3000 | 4000 | 5000 | 6000 | 8000 | 8000 | 10MW |
| | Min. | 75 | 125 | 150 | 300 | 400 | 1500 | 2000 | 2500 | 3000 | 4000 | 4000 | 5000KW |
| RATIO 800/5 (160:1) | Normal | 150KW | 250KW | 300KW | 600KW | 800KW | 3000KW | 5000KW | 6000KW | 6000KW | 8000KW | 10MW | 12MW |
| | Max. | 200 | 350 | 400 | 800 | 1000 | 4000 | 6000 | 7500 | 8000 | 10MW | 12MW | 15MW |
| | Min. | 100 | 175 | 200 | 400 | 500 | 2000 | 3000 | 3000 | 4000 | 5000KW | 6000KW | 7500KW |
| RATIO 1000/5 (200:1) | Normal | 200KW | 350KW | 400KW | 800KW | 1000KW | 4000KW | 6000KW | 6000KW | 8000KW | 10MW | 12MW | 15MW |
| | Max. | 250 | 450 | 500 | 1000 | 1200 | 5000 | 8000 | 8000 | 10MW | 12MW | 15MW | 18MW |
| | Min. | 125 | 225 | 250 | 500 | 600 | 2500 | 4000 | 4000 | 5000KW | 6000KW | 7500KW | 10MW |
| RATIO 1200/5 (240:1) | Normal | 250KW | 400KW | 500KW | 1000KW | 1200KW | 5000KW | 7000KW | 8000KW | 10MW | 12MW | 15MW | 10MW |
| | Max. | 300 | 500 | 600 | 1200 | 1500 | 6000 | 8000 | 10MW | 12MW | 15MW | 18MW | 20MW |
| | Min. | 150 | 250 | 300 | 600 | 750 | 3000 | 4000 | 5000KW | 6000KW | 7500KW | 10MW | 10MW |
| RATIO 1500/5 (300:1) | Max. | 300KW | 500KW | 600KW | 1200KW | 1500KW | 6000KW | 10MW | 10MW | 12MW | 15MW | 20MW | 20MW |
| | Max. | 400 | 700 | 750 | 1500 | 2000 | 8000 | 12 | 12 | 15 | 20 | 20 | 25 |
| | Min. | 200 | 350 | 375 | 1000 | 1000 | 4000 | 6000KW | 6000KW | 7500KW | 10MW | 10MW | 12.5MW |
| RATIO 2000/5 (400:1) | Normal | 400KW | 750KW | 800KW | 1600KW | 2000KW | 8000KW | 12MW | 12MW | 15MW | 20MW | 25MW | 30MW |
| | Max. | 500 | 800 | 1000 | 2000 | 2500 | 10MW | 15 | 15 | 20 | 25 | 30 | 35 |
| | Min. | 250 | 400 | 500 | 750 | 1250 | 5000 | 7500KW | 7500KW | 10MW | 12.5MW | 15MW | 20MW |
| RATIO 3000/5 (600:1) | Normal | 750KW | 1000KW | 1200KW | 2000KW | 3000KW | 12MW | 18MW | 20MW | 25MW | 30MW | 35MW | 40MW |
| | Max. | 800 | 1200 | 1500 | 3000 | 4000 | 15 | 20 | 25 | 30 | 40 | 40 | 50 |
| | Min. | 400 | 600 | 750 | 1500 | 2000 | 7500KW | 10MW | 12.5MW | 15MW | 20MW | 20MW | 25MW |
| RATIO 4000/5 (800:1) | Normal | 800KW | 1200KW | 1500KW | 3000KW | 4000KW | 15MW | 20MW | 25MW | 30MW | 40MW | 50MW | 50MW |
| | Max. | 1000 | 1500 | 2000 | 4000 | 5000 | 20 | 30 | 30 | 40 | 50 | 60 | 75 |
| | Min. | 500 | 750 | 1000 | 2000 | 2500 | 10MW | 15MW | 15MW | 20MW | 25MW | 30MW | 40MW |
| RATIO 5000/5 (1000:1) | Normal | 1000KW | 1500KW | 2000KW | 4000KW | 5000KW | 20MW | 30MW | 20MW | 40MW | 50MW | 60MW | 75MW |
| | Max. | 1250 | 2000 | 2500 | 5000 | 6000 | 25 | 40 | 25 | 50 | 60 | 80 | 80 |
| | Min. | 500 | 1000 | 1250 | 2500 | 3000 | 12.5MW | 20MW | 12.5MW | 25MW | 30MW | 40MW | 40MW |
| RATIO 6000/5 (1200:1) | Normal | 1200KW | 2000KW | 2500KW | 5000KW | 6000KW | 25MW | 35MW | 40MW | 50MW | 60MW | 60MW | 80MW |
| | Max. | 1500 | 2500 | 3000 | 6000 | 8000 | 30 | 40 | 50 | 60 | 80 | 80 | 100 |
| | Min. | 750 | 1250 | 1500 | 3000 | 4000 | 15MW | 20MW | 25MW | 30MW | 40MW | 40MW | 50MW |

Wattmeter | VArmeter Scale Selector Guide

| Primary potential transformer voltage system | | | 12kV | 14.4kV | 24kV | 34.5kV | 38kV | 46kV | 92kV | 115kV | 138kV | 345kV | 765kV |
|--|--------|--|---------|---------|---------|---------|---------|---------|---------|----------|----------|----------|----------|
| | | | (100:1) | (120:1) | (200:1) | (300:1) | (330:1) | (400:1) | (800:1) | (1000:1) | (1200:1) | (3000:1) | (6000:1) |
| 3-phase 3-wire (L-L) system voltage | | | 12KV | 14.4kV | 24kV | 34.5kV | 38kV | 46kV | 92kV | 115kV | 138kV | 345kV | 765kV |
| 3-phase 4-wire (L-N) current transformer | | | 6900 | 8300 | 13.8KV | 20kV | 22kV | 26.5kV | 53kV | 66kV | 80kV | 200kV | 440kV |
| RATIO 25/5 (5:1) | Normal | | 500KW | 600KW | 1000KW | 1500KW | 1500KW | 1500KW | 3000KW | 5000KW | 6000KW | 15MW | 30MW |
| | Max. | | 650 | 800 | 1200 | 1500 | 2000 | 2500 | 200 | 200 | 250 | 300 | 400 |
| | Min. | | 325 | 400 | 600 | 750 | 1000 | 1250 | 100 | 100 | 125 | 150 | 200 |
| RATIO 50/5 (10:1) | Normal | | 1000KW | 1200KW | 2000KW | 3000KW | 3000KW | 3500KW | 8000KW | 10MW | 12MW | 30MW | 60MW |
| | Max. | | 1200 | 1500 | 2500 | 3500 | 4000 | 5000 | 10MW | 12 | 15 | 35 | 80 |
| | Min. | | 600 | 750 | 1250 | 1750 | 2000 | 2500 | 5000KW | 6000KW | 7500KW | 15 | 40 |
| RATIO 75/5 (15:1) | Normal | | 1500KW | 1800KW | 3000KW | 4000KW | 5000KW | 5000KW | 10MW | 15MW | 15MW | 45MW | 100MW |
| | Max. | | 2000 | 2000 | 4000 | 5000 | 6000 | 7500 | 15 | 15 | 20 | 50 | 125 |
| | Min. | | 1000 | 1000 | 2000 | 2500 | 3000 | 3000 | 7500KW | 7500KW | 10 | 25 | 50 |
| RATIO 100/5 (20:1) | Normal | | 2000KW | 2500KW | 4000KW | 6000KW | 6000KW | 7500KW | 15MW | 20MW | 25MW | 60MW | 125MW |
| | Max. | | 2500 | 3000 | 5000 | 7500 | 8000 | 10MW | 20 | 25 | 30 | 70 | 150 |
| | Min. | | 1250 | 1500 | 2500 | 3000 | 4000 | 5000KW | 10 | 12.5 | 15 | 35 | 75 |
| RATIO 150/5 (30:1) | Normal | | 3000KW | 3500KW | 6000KW | 10MW | 10MW | 10MW | 20MW | 30MW | 35MW | 90MW | 200MW |
| | Max. | | 4000 | 4000 | 4000 | 10 | 12 | 15 | 30 | 35 | 40 | 100 | 250 |
| | Min. | | 2000 | 2000 | 2000 | 5000KW | 6000KW | 7500KW | 15 | 15 | 20 | 50 | 100 |
| RATIO 200/5 (40:1) | Normal | | 4000KW | 4500KW | 8000KW | 12MW | 12MW | 15MW | 30MW | 35MW | 50MW | 100MW | 250MW |
| | Max. | | 5000 | 6000 | 5000 | 15 | 15 | 20 | 40 | 50 | 60 | 150 | 300 |
| | Min. | | 2500 | 3000 | 2500 | 7500KW | 7500KW | 10 | 20 | 25 | 30 | 75 | 150 |
| RATIO 300/5 (60:1) | Normal | | 6000KW | 7000KW | 12MW | 18MW | 18MW | 20MW | 45MW | 60MW | 75MW | 150MW | 400MW |
| | Max. | | 8000 | 8000 | 15 | 20 | 25 | 30 | 60 | 75 | 80 | 200 | 500 |
| | Min. | | 4000 | 4000 | 7.5 | 10 | 12.5 | 15 | 30 | 30 | 40 | 100 | 250 |
| RATIO 400/5 (80:1) | Normal | | 8000KW | 10MW | 15MW | 24MW | 25MW | 30MW | 60MW | 80MW | 100MW | 200MW | 500MW |
| | Max. | | 10MW | 12 | 20 | 30 | 30 | 40 | 80 | 100 | 120 | 300 | 600 |
| | Min. | | 5000KW | 6000KW | 10 | 15 | 15 | 20 | 40 | 50 | 60 | 150 | 300 |
| RATIO 600/5 (120:1) | Normal | | 12MW | 15MW | 25MW | 35MW | 40MW | 45MW | 90MW | 100MW | 150MW | 350MW | 800KW |
| | Max. | | 15 | 18 | 30 | 40 | 50 | 60 | 120 | 150 | 180 | 450 | 1000 |
| | Min. | | 7500KW | 10 | 15 | 20 | 25 | 30 | 60 | 75 | 75 | 225 | 500 |
| RATIO 800/5 (160:1) | Normal | | 15MW | 20MW | 30MW | 50MW | 50MW | 60MW | 120MW | 150MW | 200MW | 500MW | 1000MW |
| | Max. | | 20 | 25 | 40 | 60 | 60 | 80 | 150 | 200 | 200 | 600 | 1200 |
| | Min. | | 10 | 12.5 | 20 | 30 | 30 | 40 | 75 | 100 | 100 | 300 | 600 |
| RATIO 1000/5 (200:1) | Normal | | 20MW | 25MW | 40MW | 50MW | 60MW | 75MW | 150MW | 200MW | 250MW | 600MW | 1200MW |
| | Max. | | 25 | 30 | 50 | 60 | 80 | 100 | 200 | 250 | 300 | 750 | 1500 |
| | Min. | | 12.5 | 15 | 25 | 30 | 40 | 50 | 100 | 125 | 150 | 300 | 750 |
| RATIO 1200/5 (240:1) | Normal | | 25MW | 30MW | 50MW | 60MW | 80MW | 100MW | 175MW | 250MW | 300MW | 750MW | 1500MW |
| | Max. | | 30 | 35 | 60 | 80 | 100 | 120 | 200 | 300 | 350 | 900 | 2000 |
| | Min. | | 15 | 20 | 30 | 40 | 50 | 60 | 100 | 150 | 175 | 450 | 1000 |
| RATIO 1500/5 (300:1) | Normal | | 30MW | 35MW | 60MW | 75MW | 100MW | 120MW | 250MW | 300MW | 350MW | 900MW | 2000MW |
| | Max. | | 40 | 40 | 80 | 100 | 120 | 150 | 300 | 350 | 450 | 1000 | 2500 |
| | Min. | | 20 | 20 | 40 | 50 | 60 | 75 | 150 | 175 | 225 | 500 | 1250 |
| RATIO 2000/5 (400:1) | Normal | | 40MW | 50MW | 80MW | 100MW | 120MW | 150MW | 300MW | 400MW | 500MW | 1000MW | 2500MW |
| | Max. | | 50 | 60 | 100 | 150 | 150 | 200 | 400 | 500 | 600 | 1500 | 3000 |
| | Min. | | 25 | 30 | 50 | 75 | 75 | 100 | 200 | 250 | 300 | 750 | 1500 |
| RATIO 3000/5 (600:1) | Normal | | 60MW | 75MW | 100MW | 150MW | 200MW | 200MW | 400MW | 600MW | 700MW | 1500MW | 3500MW |
| | Max. | | 80 | 80 | 150 | 200 | 250 | 300 | 500 | 750 | 900 | 2000 | 5000 |
| | Min. | | 40 | 40 | 75 | 100 | 125 | 150 | 250 | 350 | 450 | 1000 | 2500 |
| RATIO 4000/5 (800:1) | Normal | | 80MW | 100MW | 150MW | 200MW | 250MW | 300MW | 500MW | 800MW | 1000MW | 2000MW | 500MW |
| | Max. | | 100 | 125 | 200 | 300 | 300 | 400 | 800 | 1000 | 1200 | 3000 | 6000 |
| | Min. | | 50 | 60 | 100 | 150 | 150 | 200 | 400 | 500 | 600 | 1500 | 3000 |
| RATIO 5000/5 (1000:1) | Normal | | 100MW | 125MW | 200MW | 250MW | 300MW | 4000MW | 750MW | 1000MW | 1200MW | 3000MW | 6000MW |
| | Max. | | 120 | 150 | 250 | 300 | 400 | 500 | 1000 | 1200 | 1500 | 3500 | 8000 |
| | Min. | | 60 | 75 | 125 | 150 | 200 | 250 | 500 | 600 | 750 | 1750 | 4000 |
| RATIO 6000/5 (1200:1) | Normal | | 120MW | 150MW | 250MW | 350KW | 400MW | 450MW | 1000MW | 1200MW | 1500MW | 3500MW | 8000MW |
| | Max. | | 150 | 175 | 300 | 400 | 500 | 600 | 1200 | 1500 | 1750 | 4000 | 10000 |
| | Min. | | 75 | 80 | 150 | 200 | 250 | 300 | 600 | 750 | 800 | 2000 | 5000 |

AC Wattmeters

**Product Codes - 1-Element, Transformer Rated, 50/60Hz
Integral Transducer - Accuracy 1.0%, 50/60Hz**



AC Wattmeter

Fig. A1 Models 007-215, 007-215
Wattmeter Single Phase

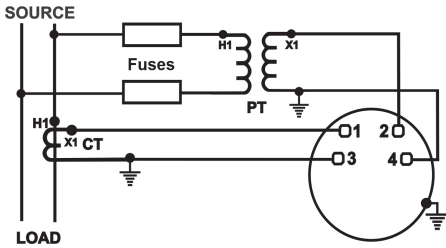


Fig. B1 Models 007-218, 078-218
Wattmeter 3-Phase 3-Wire
Unbalanced Load


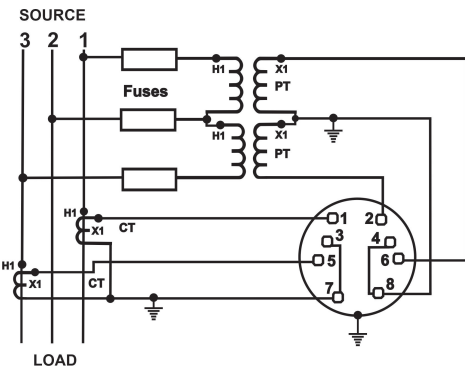


Fig. C1 Models 007-219, 078-219
Wattmeter 3-Phase 4-Wire
Unbalanced Load

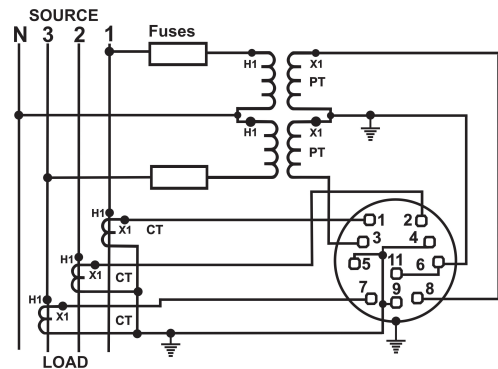

| Phases | Wires | Amperes 1VA max. burden | Volts 1 VA max. burden | Scaling | 4 1/2" square flange | |
|--------|-------|----------------------------|---------------------------|---------|-----------------------------|--------------------------------------|
| | | | | | Std. case catalog number | Std. case hi-shock catalog number |
| 1 | 2 | 5 | 120V | To suit | •007-215A-QQ**-C7 | 078-215J-QQ**-C6 |
| 1 | 2 | 5 | 240V | To suit | 007-215A-QS**-C7 | 078-215J-QS**-C6 |

For connection diagram refer to Figure A1

**Product Codes - 2 -Element, Transformer Rated, 50/60Hz
Taut Band Integral Transducer - Accuracy 1.0%, 50/60Hz**

| | | | | | | |
|---|---|---|------|---------|-------------------|------------------|
| 3 | 3 | 5 | 120V | To suit | •007-218A-QQ**-C7 | 078-218J-QQ**-C6 |
| 3 | 3 | 5 | 208V | To suit | •007-218A-QR**-C7 | 078-218J-QR**-C6 |
| 3 | 3 | 5 | 240V | To suit | •007-218A-QS**-C7 | 078-218J-QS**-C6 |
| 3 | 3 | 5 | 380V | To suit | •007-218A-QX**-C7 | 078-218J-QX**-C6 |
| 3 | 3 | 5 | 480V | To suit | •007-218A-QT**-C7 | 078-218J-QT**-C6 |

For connection diagram refer to Figure B1

**Product Codes - 2 1/2 - Element, Transformer Rated, 50/60Hz
Taut Band Integral Transducer - Accuracy 1.0%, 50/60Hz**

| | | | | | | |
|---|---|---|------|---------|-------------------|------------------|
| 3 | 4 | 5 | 69V | To suit | •007-219A-QL-C7** | 078-219J-QL**-C6 |
| 3 | 4 | 5 | 120V | To suit | •007-219A-QQ-C7** | 078-219J-QQ**-C6 |
| 3 | 4 | 5 | 277V | To suit | •007-219A-QY-C7** | 078-219J-QY**-C6 |
| 3 | 4 | 5 | 346V | To suit | •007-219A-QZ-C7** | 078-219J-QZ**-C6 |

For connection diagram refer to Figure C1.

- * Other scales are available.
- ** Specify CT (Current Transformer) and VT (Voltage Transformer) ratios if used and preferred scale at time of ordering.
- c-UL-us certified.

AC VArmeters

Product Codes - Element, Transformer Rated, 50/60Hz
Integral Transducer - Accuracy 1.0%, 50/60Hz

| Measured System | | | | Scaling | 4 1/2" square flange | |
|-----------------|-------|----------------------------|---------------------------|---------|-----------------------------|--------------------------------------|
| Phases | Wires | Amperes 1VA max. burden | Volts 1 VA max. burden | | Std. case catalog number | Std. case hi-shock catalog number |
| 3 | 3 | 5 | 120V | To suit | •007-31LA-QQ**-C7 | 078-31LJ-QQ**-C6 |
| 3 | 3 | 5 | 208V | To suit | •007-31LA-QR**-C7 | 078-31LJ-QR**-C6 |
| 3 | 3 | 5 | 240V | To suit | •007-31LA-QS**-C7 | 078-31LJ-QS**-C6 |
| 3 | 3 | 5 | 380V | To suit | •007-31LA-QX**-C7 | 078-31LJ-QX**-C6 |
| 3 | 3 | 5 | 480V | To suit | •007-31LA-QT**-C7 | 078-31LJ-QT**-C6 |

For connection diagram refer to Figure D1

Product Codes - 2 1/2-Element, Transformer Rated, 50/60Hz
Taut Band Integral Transducer - Accuracy 1.0%, 50/60Hz

| | | | | | | |
|---|---|---|------|---------|-------------------|------------------|
| 3 | 4 | 5 | 120V | To suit | •007-31UA-QQ**-C7 | 078-31UJ-QQ**-C6 |
| 3 | 4 | 5 | 208V | To suit | •007-31UA-QR**-C7 | 078-31UJ-QR**-C6 |
| 3 | 4 | 5 | 480V | To suit | •007-31UA-QT**-C7 | 078-31UJ-QT**-C6 |


For connection diagram refer to Figure D1.

- * Other scales are available.
- ** Specify CT (Current Transformer) and VT (Voltage Transformer) ratios if used and preferred scale at time of ordering.
- c-UL-us certified.



AC VArmeter

Fig. D2 Models 007-31L, 078-31L
 VArmeter 3-Phase 3-Wire
 Unbalanced Load

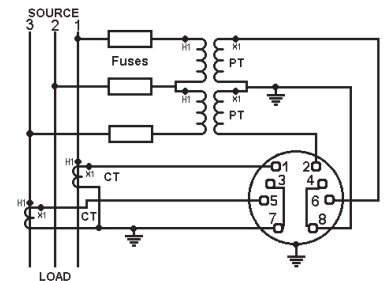

DC Transducer Indicators

Product Codes

| Rating | Scaling* | 4 1/2" square flange | |
|------------------|----------|-----------------------------|--------------------------------------|
| | | Std. case catalog number | Std. case hi-shock catalog number |
| Watts 1mA | To suit | •007-055A-FA** | 078-055J-FA** |
| VARS 1mA | To suit | •007-056A-FA** | 078-056J-FA** |
| Frequency 1mA | To suit | •007-053A-FA** | 078-053J-FA** |
| Power factor 1mA | To suit | •007-054A-FA** | 078-054J-FA** |
| AC amps 1mA | To suit | •007-05AA-FA** | 078-05AJ-FA** |
| AC volts 1mA | To suit | •007-05VA-FA** | 078-05VJ-FA** |
| Speed 1mA | To suit | •007-052A-FA** | 078-052J-FA** |
| VA 1mA | To suit | •007-057A-FA** | 078-057J-FA** |

- *Case types 007/078 use 10-32 UNF terminals.
- **Specify scale. Input: 1mA DC for 4/20mA change "FA" to "HG".
- c-UL-us certified.

For use with the following transducers: Watts, Vars, Frequency, Power Factor, AC amperes, AC volts and temperature.



DC Transducer Indicator



Elapsed Time Meter

Elapsed Time Meters

**Product Codes - 99,999.99 Hours, Non Reset, Burden 2.5VA
50 or 60Hz**

Synchronous motor running time meter with a non-resettable indicator.

| Rating | 4 1/2" square flange | |
|------------------|--------------------------|-----------------------------------|
| | Std. case catalog number | Std. case hi-shock catalog number |
| 110/130V 50Hz | •007-155A-PNZH-C5 | 078-155J-PNZH-C5 |
| 200/250V 50Hz | •007-155A-RNZH-C5 | 078-155J-RNZH-C5 |
| 480V 50Hz | •007-155A-SEZH-C5 | 078-155J-SEZH-C5 |
| 110/130V 60Hz | •007-156A-PNZH-C6 | 078-156J-PNZH-C6 |
| 200/250V 60Hz | •007-156A-RNZH-C6 | 078-156J-RNZH-C6 |
| 480V 60Hz | •007-156A-SEZH-C6 | 078-156J-SEZH-C6 |
| 12/24/40/110V DC | 007-151A-**-ZH-DC | Not Available |



AC Phase Sequence and Phase Failure Indicator

AC Phase Sequence, Phase Failure Indicators


Product Codes - Neon Bulb Type, Burden 2.5VA

Two neon bulbs for phase sequence indication - first marked the caption "correct 1-2-3", the second marked "incorrect 3-2-1". Three neon bulbs for phase failure indication - first marked 1, second marked 2, third marked 3.

| Rating | 4 1/2" square flange | |
|------------------|--------------------------|-----------------------------------|
| | Std. case catalog number | Std. case hi-shock catalog number |
| 100/150V 50/60Hz | 077-12PA-P2C6 | Not available |
| 151/300V 50/60Hz | 077-12PA-P3C6 | Not available |
| 301/500V 50/60Hz | 077-12PA-P4C6 | Not available |

For connection diagram refer to Figure E.

Fig. E Model 007-12P
Phase Sequence Indicator
3-Phase 3- or 4-Wire systems



DC Indicators for Tachometer Generators

Product Code

| Rating | 4 1/2" square flange | |
|----------|--------------------------|-----------------------------------|
| | Std. case catalog number | Std. case hi-shock catalog number |
| DC Volts | 007-052A-** | 078-052J-*** |

Select nearest higher rated voltmeter and specify requirement.

- * Other ranges are available. upon request Consult with the factory.
- ** RI for 10 ohm or R2 for 100 ohm platinum.
- *** Specify input and scale.
- c-UL-us certified.

AC Power Factor Meter

Specifications



AC Power Factor Meter

Fig. E Models 007-425, 078-425J
Electronic Phase Angle Meter
Single Phase


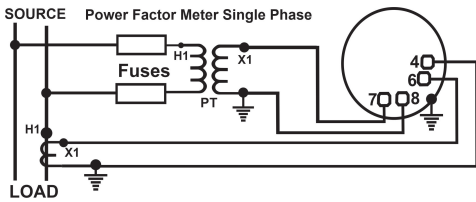


Fig. F Models 007-427, 078-427J
Electronic Phase Angle Meter
3-phase, 3- or 4-wire Balanced Load

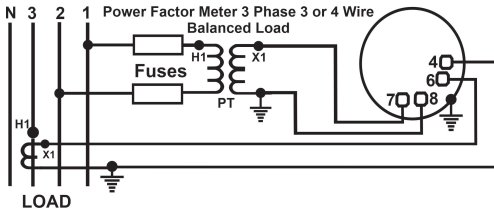

| | |
|--|--|
| Ratings, self-contained | Current windings 5A. Voltage windings minimum 50V, maximum 600V |
| Accuracy | Balanced load: Class 1 |
| Overshoot | 33% |
| External temperature influence | 0.5% fid minimum |
| External field influence | 0.5% fid maximum |
| Frequency range | 50Hz or 60Hz standard, 25-3000Hz optional (Specify) |
| Frequency influence | Single phase instruments, 59 to 61Hz 1.0% fid maximum polyphase instruments $\pm 10\%$ deviation from 69Hz: 1.0% |
| Overload capacity: 25% indefinitely | Current coils 1000% momentarily, 100% for 15 minutes Voltage circuits 25% indefinitely |
| Burdens | Each current circuit, 1.5VA approximately Each voltage circuit 1VA approximately Measuring systems 077-427-3 or 4-wire |
| Ranges available | Lag 0.5-1 - 0.5 lead power factor Lag 0.2-1 - 0.8 lead power factor |

Product Codes - Balanced Load - Accuracy $\pm 1\%$

| Phases | Wires | Amperes 2VA max. burden | Volts 1 VA max. burden | Scaling | 4 1/2" square flange | |
|--------|-------|----------------------------|---------------------------|-----------|-----------------------|--------------------------------|
| | | | | | Std. case catalog no. | Std. case hi-shock catalog no. |
| 1 | 2 | 5 | 120V | 0.5-1-0.5 | •007-425A-QQAD-C6 | 078-425J-QQAD-C6 |
| 1 | 2 | 5 | 240V | 0.5-1-0.5 | •007-425A-QSAD-C6 | 078-427J-QSAD-C6 |
| 3 | 3/4 | 5 | 120V | 0.5-1-0.5 | •007-427A-QQAD-C6 | 078-427J-QQAD-C6 |
| 3 | 3/4 | 5 | 208V | 0.5-1-0.5 | •007-427A-QRAD-C6 | 078-427J-QRAD-C6 |
| 3 | 3/4 | 5 | 240V | 0.5-1-0.5 | •007-427A-QSAD-C6 | 078-427J-QSAD-C6 |
| 3 | 3/4 | 5 | 480V | 0.5-1-0.5 | •007-427A-QTAD-C6 | 078-427J-QTAD-C6 |

Instruments may be used on loads down to 20% of current and between 90% and 110% of voltage rating.

For connection diagrams refer to Fig. E and F.

- c-UL-us certified.

LED Digital | Analog Combination

Crompton Instruments model 007-DI features a combination of the traditional 250° 4 1/2" switchboard indicator with the trend indication plus the benefits of wide angle LED visibility. This rugged shock and vibration resistant design provides precision accuracy and instantaneous reading via the bright in-dial mounted 3 1/2" digit LED display.

Description

Model 007-DI digital analog indicators are ideal for all applications where moving pointer instruments are preferable to indicate trend with the simultaneous display of a high visibility precision LED readout for increased user interface.

The 007-DI is interchangeable with other analog and digital instruments designed to directly mount in to a standard ANSI-C39. 4 1/2" switchboard cut-out.

Available in side, center, or off-set zero versions, the 007-DI can accept AC and DC current and voltage inputs as well as a wide range of transducer outputs, making it suitable for a variety of other applications including low-load current, temperature, speed, Watt/Vars, percent and level.



Features

- Rugged shock and vibration resistant pivot and jewel design
- High accuracy LED display
- Wide selection of AC and DC inputs
- Maximum trend indication visibility
- Input isolation
- External decimal point selection option
- Interchangeable with 4 1/2" switchboard meters

Benefits

- Cost effective
- Meets all the requirement of ANSI-C39.1 (1981)
- IP54 (NEMA 3) protection
- Optional IP55 (NEMA 4) gasket
- Bump, shock and vibration proof
- Customized option and features

Applications

- Switchgear
- Distribution systems
- Generator sets
- Control panels
- Energy management
- Building management
- Utility power monitoring
- Process control
- Motor control

Specifications

| | |
|-----------------------------------|--|
| Inputs | DC Voltage: 20mV-600V (1MΩ input impedance as standard) DC Current: 1mA-1A, 4 to 20mA (Voltage drop 200mV nominal) External shunt operation (50mV and 100mV) AC Voltage: 200mV-600V (1 kΩ /volt) AC Current: 1mA-999mA (Using internal shunt, voltage drop 200mV nominal) 1A, 2A, 5A and 10A using internal current transformer |
| Common mode rejection | =>80dB @ 50/60Hz |
| Overload | Voltage: x 1.2 continuous. x 1.5 for 10 seconds Current using internal CT: x 1.2 continuous. x 10 for 10 seconds |
| External power requirement | Standard: 120 and 240V 315% Optional: 480V 315% AC 40-60Hz |
| Burden | 3VA @ 60Hz |
| DC | Standard: 12, 24, 48, 110 and 125V ±15% |
| Display analog | Long-scale moving coil. 250° deflection. Scale length 6.8" Response time less than 2.5 seconds |
| Display options | Center or offset zero. Scale plate in colors other than white Colored lines or segments on scale |
| Digital display | 3 1/2 digit red LED. 7 segment (7.6mm, 0.3" high). Right hand decimal points. Polarity indication: positive / none. Negative / horizontal bar " - ". Update time (standard): 1 per second |
| Accuracy - analog | DC and AC ±1% of FSD (calibrated at 25°C) |
| Accuracy - digital | DC: ±0.05% of reading ±1 count ±100ppm of reading / °C max AC current: 0-1 Amp ±0.1% reading ±3 counts ±150ppm of reading / °C AC current: 0-10 amps 30.1% reading 310 counts 3150ppm of reading / °C (maximum) AC voltage: ±0.1% of reading ±3 counts ±150ppm of reading / °C (maximum) Zero ±1 count ±0.2 counts/°C (maximum), DC offset scale only. Warm-up time: 1 minute |
| Long term stability | ±2 counts |
| Calibration check | Recommended 12 monthly intervals |
| Enclosure code | IP54 (optional IP55 using panel gasket) |
| Operational temperature | 0 to 60°C (32° - 140° F) |
| Storage temperature | -20° to 60°C (-4° - 140° F) |
| Humidity | Up to 90% relative @ 55° C. Tests to BS2011 part 2DA |
| Isolation test voltage | 2kV RMS 60Hz for 1 minute |
| Interference rejection | To IEEE STD472, ANSI C37 90A, SEN 361503, IEC 255-4 |

LED Digital | Analog Combination

Product Codes - AC Voltmeters - Direct Reading (40/70Hz)**

Digital accuracy $\pm 0.1\%$ ± 3 counts, analog accuracy $\pm 1\%$

| Rating | Scaling* | Catalog number |
|--------|----------|---------------------|
| 200mV | 0-200mV | 007-DIWA-KAKA-C6-** |
| 250mV | 0-250mV | 007-DIWA-KDKD-C6-** |
| 500mV | 0-500mV | 007-DIWA-KMKM-C6-** |
| 1V | 0-1V | 007-DIWA-LALA-C6-** |
| 5V | 0-5V | 007-DIWA-LSLS-C6-** |
| 10V | 0-10V | 007-DIWA-MTMT-C6-** |
| 15V | 0-15V | 007-DIWA-NDND-C6-** |
| 30V | 0-30V | 007-DIWA-NLNL-C6-** |
| 150V | 0-150V | 007-DIWA-PZPZ-C6-** |
| 250V | 0-250V | 007-DIWA-RSRS-C6-** |
| 300V | 0-300V | 007-DIWA-RXRX-C6-** |
| 500V | 0-500V | 007-DIWA-SFSF-C6-** |
| 600V | 0-600V | 007-DIWA-SJSJ-C6-** |

For connection diagrams, refer to Figure H.

Product Codes - AC Voltmeters Transformer Rated (40/70Hz)**

| Rating | Scaling* | Catalog number |
|--------|----------|---------------------|
| 150V | 0-300V | 007-DIWA-PZRX-C6-** |
| 150V | 0-600V | 007-DIWA-PZSJ-C6-** |
| 150V | 0-750V | 007-DIWA-PZSM-C6-** |
| 150V | 0-3000V | 007-DIWA-PZUA-C6-** |
| 143V | 0-5000V | 007-DIWA-PTUJ-C6-** |
| 150V | 0-5250V | 007-DIWA-PZUL-C6-** |
| 150V | 0-6000V | 007-DIWA-PZUP-C6-** |
| 150V | 0-9000V | 007-DIWA-PZUY-C6-** |
| 150V | 0-15kV | 007-DIWA-PZWC-C6-** |
| 150V | 0-18kV | 007-DIWA-PZWD-C6-** |
| 150V | 0-45kV | 007-DIWA-PZWJ-C6-** |
| 150V | 0-60kV | 007-DIWA-PZWL-C6-** |

For connection diagrams, refer to Figure H.

* Other scalings are available.

** Specify power supply voltage according to power supply codes table located on page 22.

*** Case types 007 use 10-32 UNF terminals.



AC Voltmeter

Fig. G Models 007-DA2, 007-DAA
LCD Digital/Analog Meter





Fig. H Models 007-DI2, 007-DIA
007-DIB, 007-DIC, 007-DIN,
007-DIT, 007-DIV, 007-DIW
LED Digital/Analog Meter




LED Digital | Analog Combination

Product Codes - AC Ammeters - Direct Reading (40/70Hz)***



AC Ammeter

Fig. 1 Models 007-DI2, 007-DIA, 007-DIB, 007-DIC, 007-DIN, 007-DIT, 007-DIV, 007-DIW
LED Digital/Analog Meter



| Rating | Scaling* | Catalog number |
|--------|----------|---------------------|
| 1A | 0-1A | 007-DIBA-LALA-C6-** |
| 1.5A | 0-1.5A | 007-DIBA-LCLC-C6-** |
| 2A | 0-2A | 007-DIBA-LELE-C6-** |
| 3A | 0-3A | 007-DIBA-LJLJ-C6-** |
| 5A | 0-5A | 007-DIBA-LSLS-C6-** |
| 8A | 0-8A | 007-DIBA-MJMJ-C6-** |
| 10A | 0-10A | 007-DIBA-MTMT-C6-** |

For connection diagrams, refer to Figure 1.

- * Other scalings are available.
- ** Specify power supply voltage according to power supply codes table located on page 22.
- *** Case types 007 use 10-32 UNF terminals.

LED Digital | Analog Combination

Product Codes - AC Ammeters Transformer Rated (40/70Hz)

Digital accuracy $\pm 0.1\%$ ± 1 counts, analog accuracy $\pm 1\%$

| Rating | Scaling* | Catalog number |
|--------|----------|---------------------|
| 5A | 0-15A | 007-DIBA-LSND-C6-** |
| 5A | 0-20A | 007-DIBA-LSNG-C6-** |
| 5A | 0-25A | 007-DIBA-LSNJ-C6-** |
| 5A | 0-30A | 007-DIBA-LSNL-C6-** |
| 5A | 0-40A | 007-DIBA-LSNP-C6-** |
| 5A | 0-50A | 007-DIBA-LSNT-C6-** |
| 5A | 0-60A | 007-DIBA-LSNW-C6-** |
| 5A | 0-75A | 007-DIBA-LSPB-C6-** |
| 5A | 0-80A | 007-DIBA-LSPD-C6-** |
| 5A | 0-100A | 007-DIBA-LSPK-C6-** |
| 5A | 0-150A | 007-DIBA-LSPZ-C6-** |
| 5A | 0-200A | 007-DIBA-LSRL-C6-** |
| 5A | 0-250A | 007-DIBA-LSRS-C6-** |
| 5A | 0-300A | 007-DIBA-LSRX-C6-** |
| 5A | 0-400A | 007-DIBA-LSSC-C6-** |
| 5A | 0-500A | 007-DIBA-LSSF-C6-** |
| 5A | 0-600A | 007-DIBA-LSSJ-C6-** |
| 5A | 0-750A | 007-DIBA-LSSM-C6-** |
| 5A | 0-800A | 007-DIBA-LSSN-C6-** |
| 5A | 0-1000A | 007-DIBA-LSSS-C6-** |
| 5A | 0-1200A | 007-DIBA-LSSU-C6-** |
| 5A | 0-1500A | 007-DIBA-LSTC-C6-** |
| 5A | 0-1600A | 007-DIBA-LSTE-C6-** |


For connection diagrams, refer to Figure J.

- * Other scalings are available.
- ** Specify power supply voltage, according to power supply codes table located on page 22.



AC Ammeter

Fig. J Models 007-DI2, 007-DIA, 007-DIB, 007-DIC, 007-DIN, 007-DIT, 007-DIV, 007-DIW LED Digital/Analog Meter



LED Digital | Analog Combination


Product Codes - DC Voltmeters - Direct Reading

Digital accuracy $\pm 0.5\%$ ± 1 counts, analog accuracy $\pm 1\%$



DC Voltmeter

Fig. K Models 007-DI2, 007-DIA, 007-DIB, 007-DIC, 007-DIN, 007-DIT, 007-DIV, 007-DIW
LED Digital/Analog Meter



| Rating | Scaling* | Catalog number |
|------------|------------|------------------|
| 200mV | 0-200mV | 007-DIVA-KAKA-** |
| 250mV | 0-250mV | 007-DIVA-KDKD-** |
| 500mV | 0-500mV | 007-DIVA-KMKM-** |
| 1V | 0-1V | 007-DIVA-LALA-** |
| 5V | 0-5V | 007-DIVA-LSLS-** |
| 10V | 0-10V | 007-DIVA-MTMT-** |
| 15V | 0-15V | 007-DIVA-NDND-** |
| 30V | 0-30V | 007-DIVA-NLNL-** |
| 50V | 0-50V | 007-DIVA-NTNT-** |
| 75V | 0-75V | 007-DIVA-PBPB-** |
| 80V | 0-80V | 007-DIVA-PDPD-** |
| 150V | 0-150V | 007-DIVA-PZPZ-** |
| 300V | 0-300V | 007-DIVA-RXRX-** |
| 400V | 0-400V | 007-DIVA-SCSC-** |
| 500V | 0-500V | 007-DIVA-SFSF-** |
| 600V | 0-600V | 007-DIVA-SJSJ-** |
| 150-0-150V | 150-0-150V | 007-DINA-RXRX-** |
| 300-0-300V | 300-0-300V | 007-DINA-SJSJ-** |
| 600-0-600V | 600-0-600V | 007-DINA-SUSU-** |

For connection diagrams, refer to Figure K.

* Other scalings are available.

** Specify power supply voltage, according to power supply codes table located on page 22.

LED Digital | Analog Combination

Product Codes - DC Ammeters - Shunt Rated

Digital accuracy $\pm 0.5\%$ ± 1 counts, analog accuracy $\pm 1\%$

| Rating | Scaling* | Catalog number |
|---------------------|---------------------------------------|------------------|
| 50mV-4mA | Scaled to suit standard shunt ratings | 007-DIAA-EY**-** |
| 50-0-50mV-2-0-2mA | | 007-DICA-GB**-** |
| 100-0-100mV | | 007-DICA-GM**-** |
| 100-0-100mV-2-0-2mA | | 007-DICA-FM**-** |

For connection diagram, refer to Figure L.

Product Codes - DC Ammeters - Suppressed Zero

Digital accuracy $\pm 0.5\%$ ± 1 counts, analog accuracy $\pm 1\%$

| Rating | Scaling* | Catalog number |
|---------|---------------------------------------|------------------|
| 1-5mA | Scaled to suit standard shunt ratings | 007-DIAA-GM**-** |
| 4-20mA | | 007-DIAA-HG**-** |
| 10-50mA | | 007-DIAA-HZ**-** |

For connection diagram, refer to Figure L.

Product Codes - DC Ammeters - Direct Reading

Digital accuracy $\pm 0.5\%$ ± 1 counts, analog accuracy $\pm 1\%$

| Rating | Scaling* | Catalog number |
|--------|----------|--------------------|
| 1mA | 0-1mA | 007-DIAA-FAFA**-** |
| 2mA | 0-2mA | 007-DIAA-FGFG**-** |
| 5mA | 0-5mA | 007-DIAA-FXFX**-** |
| 10mA | 0-10mA | 007-DIAA-GZGZ**-** |
| 20mA | 0-20mA | 007-DIAA-HFHF**-** |
| 30mA | 0-30mA | 007-DIAA-HMHM**-** |
| 50mA | 0-50mA | 007-DIAA-HYHY**-** |
| 100mA | 0-100mA | 007-DIAA-JRJR**-** |
| 200mA | 0-200mA | 007-DIAA-KAKA**-** |
| 300mA | 0-300mA | 007-DIAA-KGKG**-** |
| 500mA | 0-500mA | 007-DIAA-KMKM**-** |
| 800mA | 0-800mA | 007-DIAA-KWKW**-** |
| 1A | 0-1A | 007-DIAA-LALA**-** |


For connection diagram, refer to Figure L.

- * Other scalings are available.
- ** Specify power supply voltage, according to power supply codes table located on page 22.



DC Ammeter

Fig. L Models 007-DI2, 007-DIA, 007-DIB, 007-DIC, 007-DIN, 007-DIT, 007-DIV, 007-DIW LED Digital/Analog Meter



Switchboard Meter Options

Product Codes - Power Supply



Power Supplies

| | |
|---------------------|--------------|
| A5-120 - 250V AC/DC | MU - 12V DC |
| PQ - 120V AC | BD - 24V DC |
| A2 - 12 - 48V DC | NR - 48V DC |
| | PR - 120V DC |
| | PS - 125V DC |

Scale - Options

| Options | Option code |
|---|-------------|
| Red or colored line or mark (specify position) | SL |
| Colored zones or segments (specify limits and color(s)) | SZ |
| Customer user logo imprinted on dial | SM |

Construction - Options

| Options | Option code |
|------------------------------|-------------|
| Anti-glare window | BR |
| Polychloroprene panel gasket | MG |

The suffix option code is added at the end of the complete part number.

About TE Connectivity

TE Connectivity is a global, \$14 billion company that designs and manufactures over 500,000 products that connect and protect the flow of power and data inside the products that touch every aspect of our lives. Our nearly 100,000 employees partner with customers in virtually every industry - from consumer electronics, energy and health-care, to automotive, aerospace and communication networks - enabling smarter, faster, better technologies to connect products to possibilities.

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this catalogue, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications. TE Connectivity and TE connectivity (logo) are trademarks. CROMPTON is a trademark of Crompton Parkinson Limited and is used under licence. Other trademarks are property of their respective owners.

TE Energy – innovative and economical solutions for the electrical power industry: cable accessories, connectors & fittings, insulators & insulation, surge arresters, switching equipment, street lighting, power measurement and control.

TE Energy

Customer Center
8000 Purfoy Road
Fuquay-Varina, NC 27526-9349
T: 800-327-6996
F: 800-527-8350

For more information and your country contact person, please visit us at:
cromptonusa.com
crompton-instruments.com
energy.te.com

© 2012 Tyco Electronics Corporation. All rights reserved.
1773466-6 E499 11/12

