

CROMPTON INSTRUMENTS

CLASS PX CURRENT TRANSFORMERS



Class PX as defined in
IEC 61869-2

APPLICATIONS

- Protection systems

RELEVANT STANDARDS AND TEST REPORTS

- IEC 61869-2

TE Connectivity's (TE) Crompton Instruments PX current transformers. In some balanced protection systems where sensitivity and stability levels required are high, classes 5P10 or 10P10 may not be adequate.

In these situations a Class PX current transformer will usually be specified. Class PX as defined in IEC 61869-2 allows the manufacturer of a protection device to detail more specific requirements of the current transformer so as to achieve a more sensitive protection scheme. Typically this will involve specifying the following information for the current transformer:

1. Turns ratio
2. Minimum knee point voltage
3. Maximum secondary resistance
4. Maximum excitation current at the rated minimum knee point voltage

To enquire about Class PX current transformers contact TE Connectivity's (TE) Crompton Instruments with the above information together with any physical limiting dimensions and the aperture size required.

If not all the above information is available, details of relay type, lead run from current transformer to relay and the fault current expected to flow through the zone protected by the current transformers will be required in order to provide a quotation.


SPECIFICATIONS

Specifications	
System voltage	720V maximum
Test voltage	3kV for 1 minute
System frequency	50/60Hz
Service temperature	-20 °C to 70 °C
Humidity	Up to 95% RH (non condensing)
Insulation class	BS2757 Class Y
Compliant with	Ring Type CT IEC 61869-2

ORDERING INFORMATION

Part number	Ratio	Class	Vk	Ω at 75°C	Dimensions		
					A	B	C
81X-9412-501388	800/5	PX	52	0.35	65	135	65
81X-9412-501795	1000/5	PX	62	0.31	80	150	65
81X-9412-501802	1250/5	PX	85	0.45	90	160	65
81X-9412-501386	1600/5	PX	80	0.5	115	190	55
81X-9412-501902	2500/5	PX	112	0.6	120	192	52
81X-9412-216148	2500/5	PX	124	0.78	119	191	52

DIMENSIONAL INFORMATION

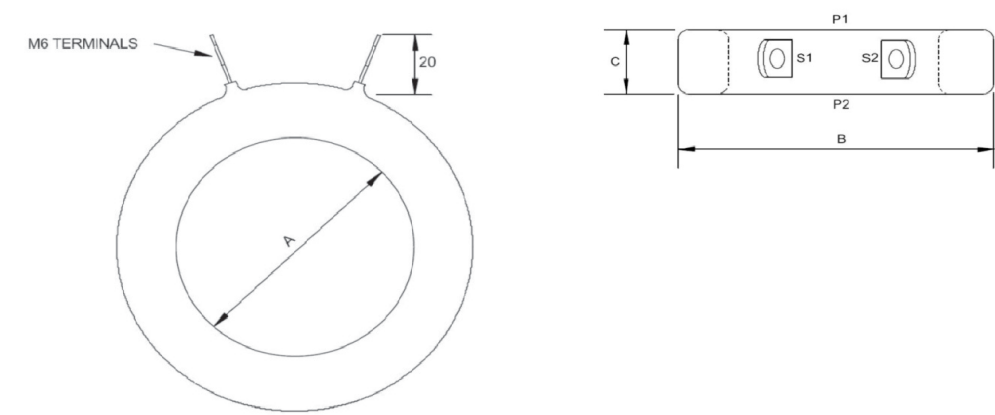

Learn more: [TE.com/energy](https://www.te.com/energy)

© 2024 TE Connectivity. All Rights Reserved.
TE, TE Connectivity, TE connectivity (logo), EVERY CONNECTION COUNTS, are trademarks owned or licensed by TE Connectivity. Other logos, product and company names mentioned herein may be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions, specifications, and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications, and/or information. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

Connect with us:
[TE.com/energy](https://www.te.com/energy)